


NOTAS (NOTES):

- 1- DIFERENCIA DE CONEXION APROXIMADA (CONNECTION DIFFERENCE APPROXIMATELY )  $3^{\circ}\text{C}\pm 1.5^{\circ}\text{C}$
- 2- MAXIMA TEMPERATURA DEL CUERPO (MAXIMUM BODY TEMPERATURE) VDE  $125^{\circ}\text{C}/$  UL  $120^{\circ}\text{C}$
- 3- CAPACIDAD DE MANIOBRA (POWER SUPPLY) P1:  $16\text{A}/400\text{V}\sim$  P2:  $6\text{A}/400\text{V}\sim$
- 4- LIMITES DE TEMPERATURA EN EL BULBO (TEMPERATURE LIMITS ON THE PHIAL)  $-10 \div 100^{\circ}\text{C}$
- 5- LAS TEMPERATURAS INDICADAS SON VALORES DE DESCONEXION P-1 (THE INDICATED TEMPERATURES ARE DISCONNECTION VALUES P-1)
- 6- EJE DIBUJADO EN POSICION "0" (SPINDLE DRAW IN "0" POSITION)
- 7- FASTON  $6,3 \times 0,8$  DIN 46244
- 8- LAS TEMPERATURAS SON MEDIDAS INTRODUCIENDO EL BULBO Y  $80/100\text{mm}$  DE CAPILAR EN EL BAÑO A TEMPERATURA AMBIENTE DE  $23\pm 3^{\circ}\text{C}$  (TEMPERATURES ARE MEASURED INTRODUCING THE PHIAL AND  $80/100\text{mm}$  CAPILLARY IN THE BATH AT AMBIENT TEMPERATURE OF  $23\pm 3^{\circ}\text{C}$ )


UKCA LABEL



\*\*SECCION DEL EJE (SPINDLE SECTION)

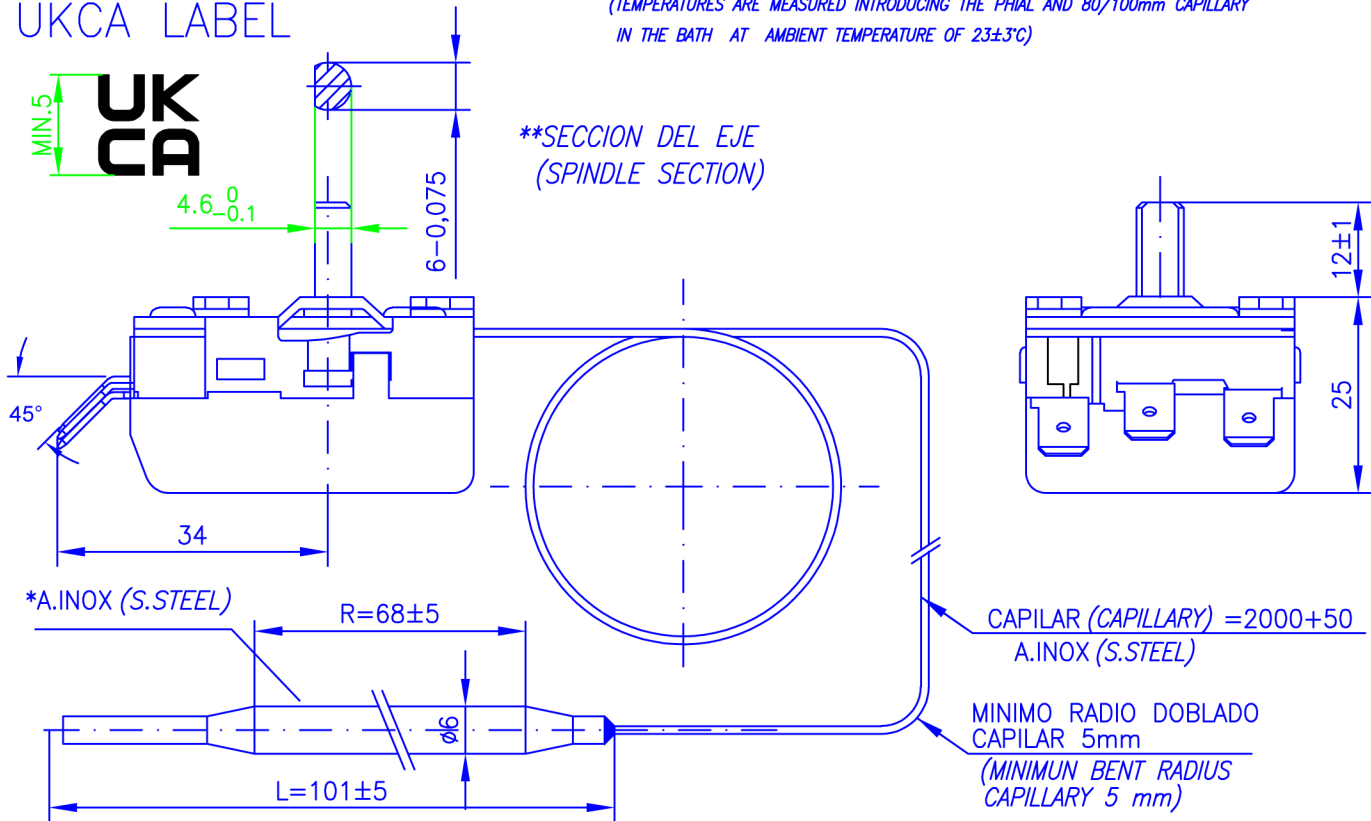

MAX. LONG. DEL TORNILLO 4 mm  
 MAS ESP. CHAPA  
 MAX.SCREW LENGHT 4mm PLUS  
 PLATE THICKNESS

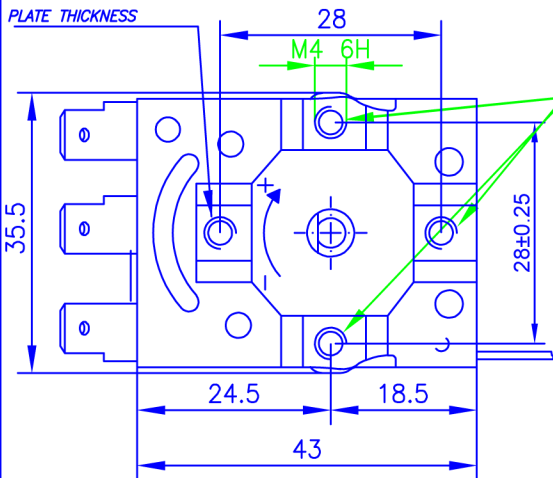

EN ESTOS AGUJEROS LA MAX. LONG. DEL TORNILLO SERA DE 6 mm MAS EL ESPESOR DE LA CHAPA  
 (IN THESE HOLES ,THE MAX. SCREW LENGHT WILL BE 6mm PLUS PLATE THICKNESS)

CIRCUITO ELECTRICO  
 POSICION DE DESCONEXION  
 (ELECTRIC DIAGRAM)  
 (OPEN POSITION)





DIAGRAMA DE TEMPERATURAS (TEMPERATURE DIAGRAM)

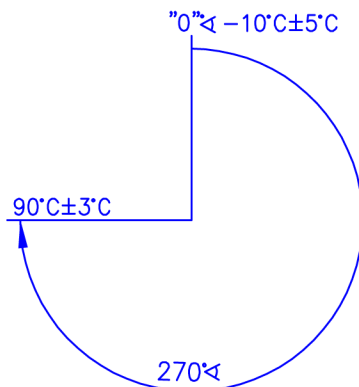

* N-871X	** N-40860/4 (1.41)	DRAWN	CHECKED	DATE
EDITION		Ç.K.	V.B.C.	01.07.2021
REVISIONS				

AR09/21

SCALE	TERMOSTATO (THERMOSTAT)
1:1	

Ref. Cliente: AR09/21  
 Replaces to: TB-09/21