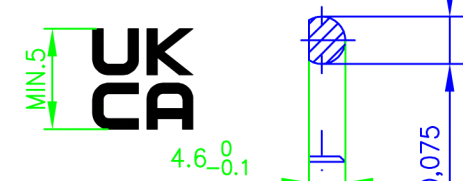
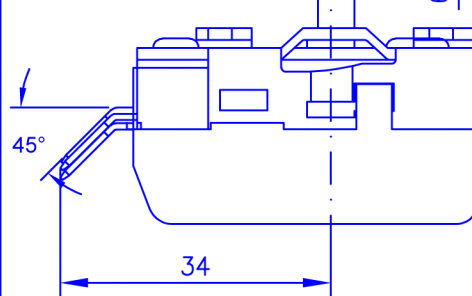


UKCA LABEL

NOTAS (NOTES):


- 1- DIFERENCIA DE CONEXION APROXIMADA (CONNECTION DIFFERENCE APPROXIMATELY) $3^{\circ}\text{C} \pm 1.5^{\circ}\text{C}$
- 2- MAXIMA TEMPERATURA DEL CUERPO (MAXIMUM BODY TEMPERATURE) VDE 125°C / UL 120°C
- 3- CAPACIDAD DE MANIOBRA (POWER SUPPLY) P1: $16\text{A}/400\text{V} \sim$ P2: $6\text{A}/400\text{V} \sim$
- 4- LIMITES DE TEMPERATURA EN EL BULBO (TEMPERATURE LIMITS ON THE PHIAL) $-10 \div 100^{\circ}\text{C}$
- 5- LAS TEMPERATURAS INDICADAS SON VALORES DE DESCONEXION P-1
(THE INDICATED TEMPERATURES ARE DISCONNECTION VALUES P-1)
- 6- EJE DIBUJADO EN POSICION "0" (SPINDLE DRAW IN "0" POSITION)
- 7- FASTON 6,3 x 0,8 DIN 46244
- 8- LAS TEMPERATURAS SON MEDIDAS INTRODUCIENDO EL BULBO Y 80/100mm DE CAPILAR EN EL BAÑO A TEMPERATURA AMBIENTE DE $23 \pm 3^{\circ}\text{C}$
(TEMPERATURES ARE MEASURED INTRODUCING THE PHIAL AND 80/100mm CAPILLARY IN THE BATH AT AMBIENT TEMPERATURE OF $23 \pm 3^{\circ}\text{C}$)

**SECCION DEL EJE
(SPINDLE SECTION)


*A.INOX (S.STEEL)

R=68±5

L=101±5


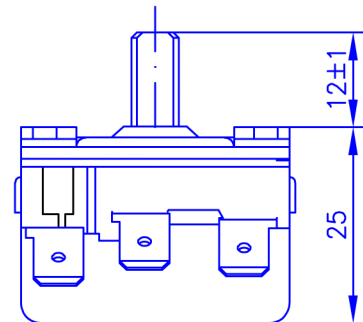
CAPILAR (CAPILLARY) = 2000±50
A.INOX (S.STEEL)MINIMO RADIO DOBLADO
CAPILAR 5mm
(MINIMUM BENT RADIUS
CAPILLARY 5 mm)

MAX. LONG. DEL TORNILLO 4 mm
MAX. ESP. CHAPA
MAX. SCREW LENGTH 4mm PLUS
PLATE THICKNESS

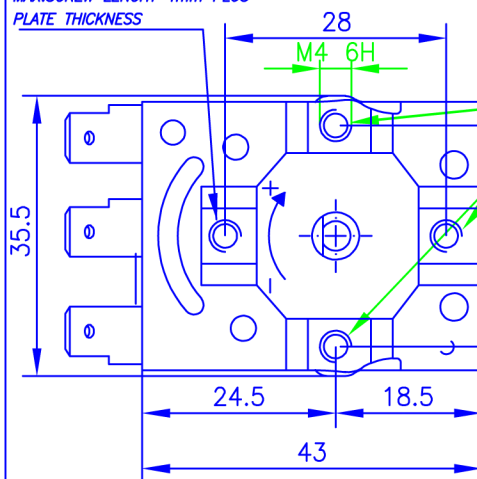

EN ESTOS AGUEROS LA MAX.
LONG. DEL TORNILLO SERA
DE 6 mm MAS EL ESPESOR
DE LA CHAPA
(IN THESE HOLES, THE MAX.
SCREW LENGTH WILL BE
6mm PLUS PLATE
THICKNESS)

CIRCUITO ELECTICO
POSICION DE DESCONEXION
(ELECTRIC DIAGRAM)
(OPEN POSITION)

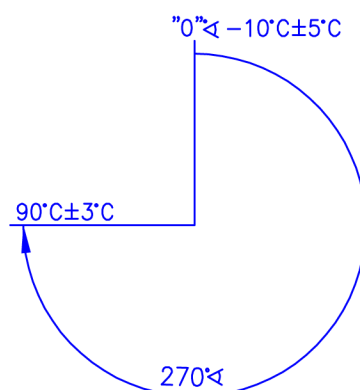DIAGRAMA DE TEMPERATURAS
(TEMPERATURE DIAGRAM)

* N-871X ** N-40860/4 (1.41)

DRAWN

CHECKED

DATE

EDITION

Ç.K.

V.B.C.

01.07.2021

AR09/21

REVISIONS

SCALE

1:1

TERMOSTATO (THERMOSTAT)

Ref. Cliente: AR09/21

Replaces to: TB-09/21