

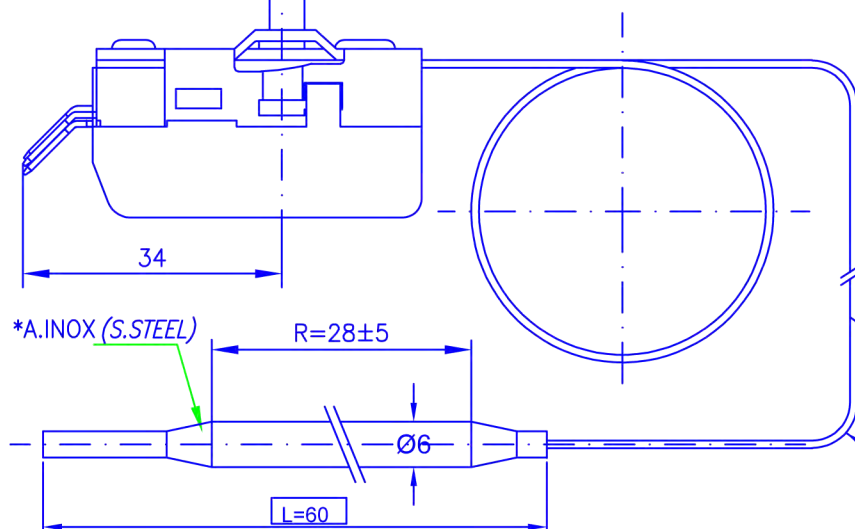


UKCA LABEL



MIN 5
UKCA**SECCION DEL EJE
(SPINDLE SECTION)

MAX. LONG. DEL TORNILLO 4 mm
MAS ESP. CHAPA
MAX.SCREW LENGHT 4mm PLUS
PLATE THICKNESS

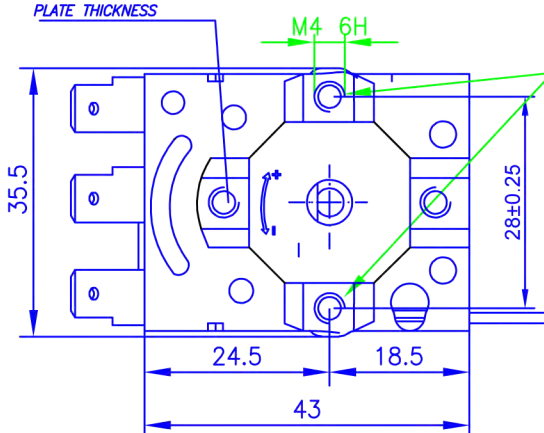

LONG. DEL TORNILLO SERA
DE 6 mm MAS EL ESPESOR
DE LA CHAPA
(IN THESE HOLES ,THE MAX.
SCREW LENGHT WILL BE
6mm PLUS PLATE
THICKNESS)
6mm PLUS PLATE


CIRCUITO ELECTICO
POSICION DE DESCONEXION
(ELECTRIC DIAGRAM)
(OPEN POSITION)



CAPILAR (CAPILLARY) =1000±50
A.INOX (S.STEEL)

MINIMO RADIO DOBLADO
CAPILAR 5mm
(MINIMUM BENT RADIUS
CAPILLARY 5 mm)

DIAGRAMA DE TEMPERATURAS
(TEMPERATURE DIAGRAM)

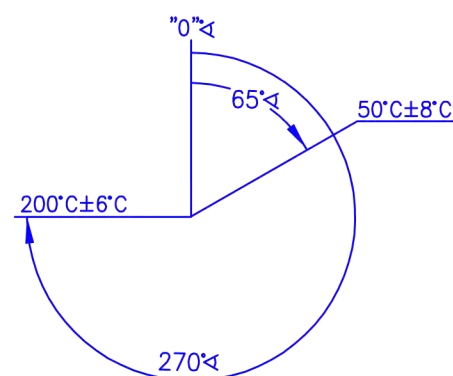

* 0,004

** N-40863/5 (1,10)

	Toler. general UNE/EN 22768 "m"	DIBUJADO	REVISADO	FECHA	AR15/1
	General tolerance UNE/EN 22768 "m"	DRAWN	APPROVED	DATE	
EDICIONES EDITIONS	EDICION EDITION	C.K.	V.B.C.	14/03/2023	
ESCALAS SCALE 1:1	TERMOSTATO (THERMOSTAT)				Ref. Cliente: AR15/1 Customer reference:
					Sustituye a: A: Replacing:

NOTAS (NOTES):

- 1- DIFERENCIA DE CONEXION APROXIMADA (CONNECTION DIFFERENCE APPROXIMATELY) 6°C±3°C
- 2- MAXIMA TEMPERATURA DEL CUERPO (MAXIMUM BODY TEMPERATURE) VDE 125°C
- 3- CAPACIDAD DE MANIOBRA (POWER SUPPLY) P1:16A/400V~ P2:6A/400V~
- 4- LIMITES DE TEMPERATURA EN EL BULBO (TEMPERATURE LIMITS ON THE PHIAL) -10 ÷ 320°C
- 5- LAS TEMPERATURAS INDICADAS SON VALORES DE DESCONEXION (P-1)
(THE INDICATED TEMPERATURES ARE DISCONNECTION VALUES)
- 6- EJE DIBUJADO EN POSICION "0" (SPINDLE DRAW IN "0" POSITION)
- 7- FASTON 6,3 x 0,8 DIN 46244
- 8- LAS TEMPERATURAS SON MEDIDAS INTRODUCIENDO EL BULBO Y 80/100mm DE CAPILAR EN EL BAÑO A TEMPERATURA AMBIENTE DE 23±3°C
(TEMPERATURES ARE MEASURED INTRODUCING THE PHIAL AND 80/100mm CAPILLARY IN THE BATH AT AMBIENT TEMPERATURE OF 23±3°C)