

Sensor SB-41

DESCRIPTION:


NTC sensor with thermoplastic polyester cable and individual isolation.
Operates in temperatures from -50°C to 105°C (-58°F to 221°F).

COMPATIBLE INSTRUMENTS:

All temperature instruments, **except** models:

- | | | | |
|-----------|-----------|-----------|-----------|
| ■ MT-622E | ■ TO-711F | ■ TO-712F | ■ TO-741B |
| ■ TO-711B | ■ TO-712B | ■ TO-721B | ■ TO-761B |

DIMENSIONS*:

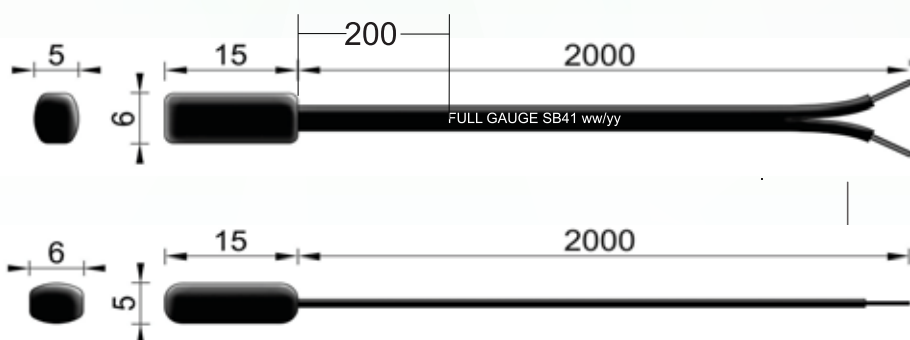

CABLE COLOR:

Black

CAPSULE TYPE:

Thermoplastic
Polyester


*All dimensions
are in millimeters.

MORE INFORMATION:

- **NTC:** Resistance of 10K Ohms at 25°C (77°F)
- **Temperature range:** -50°C to 105°C (-58°F to 221°F)
- **Precision Full Scale P. F. S.:** 1%FS
- **Response time:** Less than 8 seconds (in stirred water)
- **Tensile test:** $P_{\text{max}} = 4\text{kgf}$

FULL GAUGE'S TIP

The accessories that will
simplify your installation

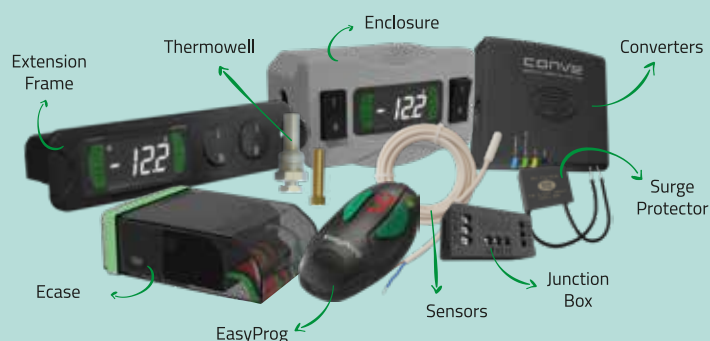

CONTACT OUR SALES TEAM FOR MORE INFORMATION



www.fullgauge.com
comex@fullgauge.com